

## Fire Sentry FS20X SPECIFICATIONS



### Multi-Spectrum IR & UV/Dual IR/VIS Flame Detector

General Specifications	
<b>Field of View</b>	90° Full 100% Cone of vision, ± 45° from on axis
<b>Sensitivity</b>	Very High, High, Medium and Low – Switch Selectable
<b>Response Time</b>	3-5 Seconds to 1 sq. ft. n-Heptane fire at 100 ft. 3-10 Seconds to 1 sq. ft. n-Heptane fire at 200 ft.
<b>Spectral Sensitivity</b>	Ultraviolet: 185 - 260 nanometers Visible: 400 – 700 nanometers Near Band IR: 0.7 – 1.1 microns Wide Band IR: 1.1 – 3.5 microns
<b>Operating Voltage</b>	24 VDC nominal (18-32 VDC) - Regulated
<b>Power Consumption</b>	Operating: 83 mA @ 24 VDC nominal
<b>Alarm</b>	133 mA @ 24 VDC nominal
<b>Heater</b>	155 mA – additional Note: Heater will turn on at 0°F (-17°C)
<b>Output Relays</b>	Fire Alarm: SPDT (NO / NC) – De-Energized/Energized, Latching/Non-Latching Fault: SPST (NO) – Normally Energized, Latching/Non-Latching Auxiliary: SPDT (NO / NC) – De-Energized/Energized, Latching/Non-Latching Contacts rating: 1 amp @ 24 VDC
<b>Analog Output</b>	0 - 20 mA stepped - Source or Sink User Selectable
<b>Loop resistance</b>	50 - 400 Ohms
<b>Communication</b>	One of the following – User Selectable: <ul style="list-style-type: none"> <li>• RS-485, ModBus Protocol</li> <li>• RS-485, FireBus II</li> <li>• RS-485 Special (optional)</li> <li>• HART, Optional plug-in module</li> </ul>
<b>Visual Indications</b>	Blue LED: Power Red LED: Alarm Yellow LED: Fault
<b>Temperature Range</b>	Operating: -40 to +185°F (-40 to +85°C) Storage: -67 to +230°F (-55 to +110°C)
<b>Humidity Range</b>	5 to 98% relative humidity, non-condensing
<b>Vibration</b>	Meets or exceeds MilSpec 810C Method 514.2, Curve AW12
<b>Wiring</b>	14 AWG (2.5mm <sup>2</sup> ) to 22 AWG (0.326mm <sup>2</sup> ); Shielded Cable Recommended
<b>Conduit Entries</b>	Standard: Two 3/4" NPT or two M25
<b>Enclosure Materials</b>	Copper-Free Powder Coated Aluminum or 316 Stainless Steel
<b>Enclosure Type</b>	NEMA 4 & 4X, IP66
<b>Certifications</b>	<b>FM:</b> Class I, Div. 1 & 2, Groups B, C, & D; Class II, Div. 1 & 2, Groups E, F, & G; Class III <b>ATEX:</b> II 2 G D; Ex d IIC T4 (Ta: -40 to +110°C), T5 (Ta: -40 to +75°C), T6 (Ta: -40 to +60°C) <b>CE:</b> Complies with EN6100-6-4 & EN50130-4
<b>Shipping Weight</b>	Aluminum: 3.6 lbs (1.6 kg) Stainless Steel: 7 lbs (3.2 kg)
<b>Mounting</b>	Swivel Bracket Assembly - Optional
<b>Warranty</b>	Three years from date of shipping

#### Find out more

[www.honeywellanalytics.com](http://www.honeywellanalytics.com)


Toll-free: 800.538.0363

#### Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

#### General Dimensions

Side and Back Views  
(All Dimensions in Inches)

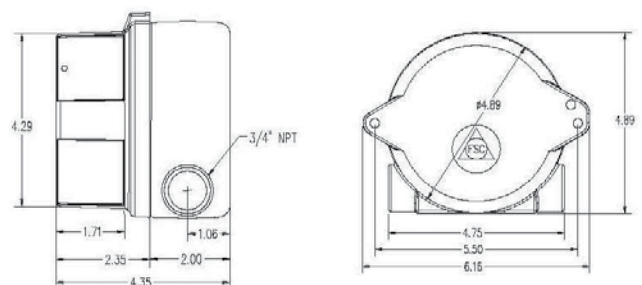

# DSA Suppliers

Thank you for reading this. For pricing or further information, please contact us.

W: <https://dsasuppliers.com>

E: [sales@dsasuppliers.com](mailto:sales@dsasuppliers.com)

P: +441158390391

---

Leading UK Supplier  
**Brand New & Genuine OEM Parts**  
Delivered Worldwide



Worldwide Delivery



1000+ Genuine Parts & Equipment

Please Note - The information, product designs & specifications in this document are subject to change without notice.  
DSA Suppliers is not responsible for determining the suitability of this product.